
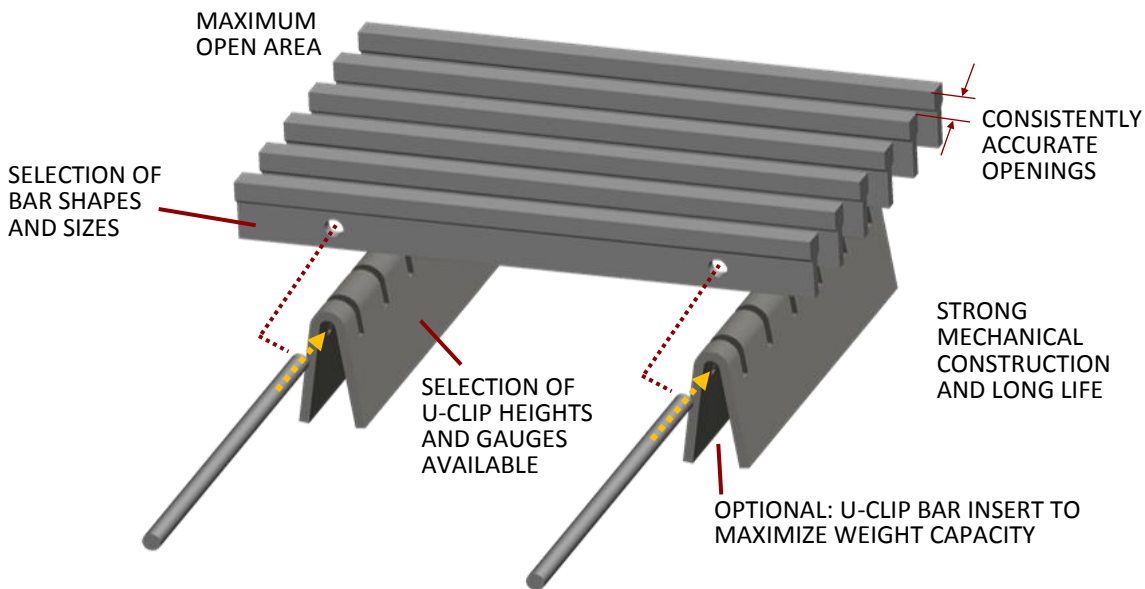
















Profile Bar Construction & Options

Hendrick's Profile Bar  is manufactured using a mechanically interlocked proprietary method of construction, making it one of the strongest systems available on the market. It's perfect for applications that require high strength or a very flat surface.

Available in slot openings 0.005" to 2.0" and flatness to 0.060"



Profile Bar <small>Images not to scale</small>												
	B69	B6S	B6	B9S	B9	B12	T9M	T9	F12	T12	T16	T24
Bar Width	.069	.093	.093	.140	.140	.187	.140	.140	.187	.187	.250	.500
Bar Height	.290	.290	.375	.320	.375	.500	.453	.453	.500	.500	.750	.750
Cap Height	.080	.080	.093	.110	.125	.156	.125	.203	.185	.188	.250	.250

- 304L, 316L, Various Grades of Stainless & Exotic Alloys, Carbon Aluminum (6061) in B9, B12 & T16
- Non-welded Interlocked Construction

